


Permanent anchoring

For each environment, a specific anchoring solution ...

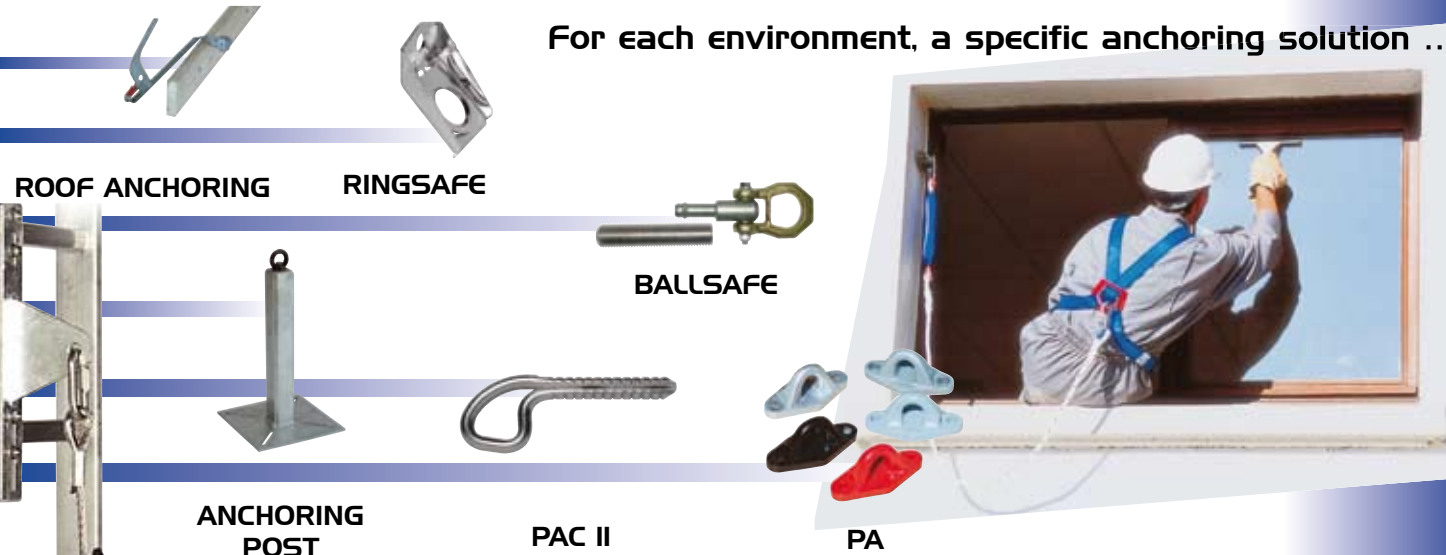


Stopcable vertical lifeline

The quick and easy-to-install vertical lifeline ...

FABA™ rigid lifeline systems

Lifeline systems on rails enabling vertical and horizontal movements...

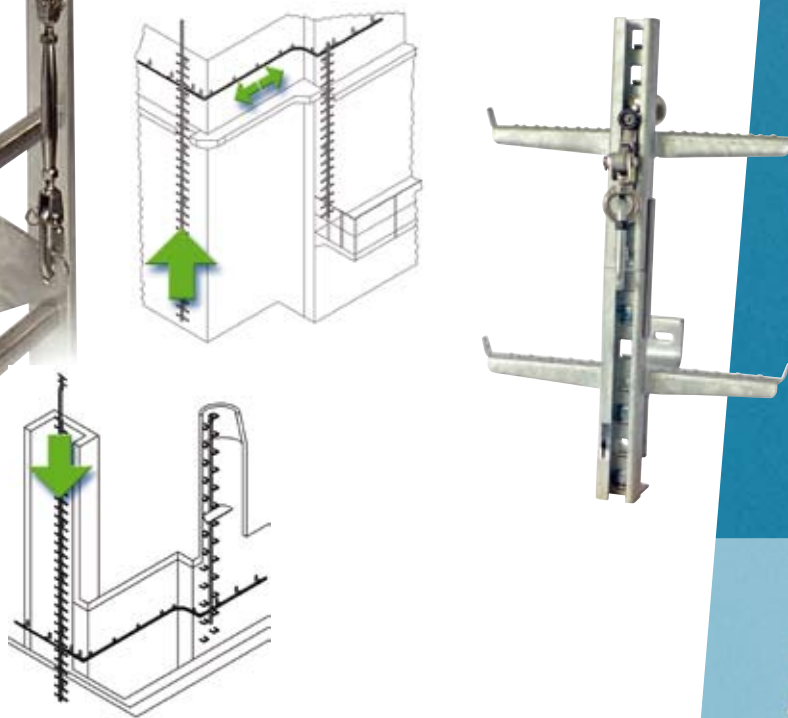

TRACTEL S.A.S.

Head Office:

RD 619, Saint-Hilaire-sous-Romilly
B.P.38 - F-10102 Romilly-sur-Seine Cedex
Tel. +33 3 25 21 07 00
Fax + 33 3 25 21 07 11
N°Siret : 422 197 962
ISO 9001- 14001
email : info.tsas@tractel.com



Export Department

3, rue du Fort Dumoulin
B.P. 1113 L-1011 Luxembourg
Tel. (352) 43 42 42 1
Fax (352) 43 42 42 200
ISO 9001- 14001
email : info.tsas@tractel.com

10060403 - 04/2008 - Noncontractual document - © TRACTEL S.A.S. 2008 - IMP. LEMAIRE - 51120 SEZANNE

PERMANENT LIFELINES



Travsafe™

Travflex™

Travspring™



Travsafe™ LIFELINES


PROVEN PERFORMANCE AND ERGONOMICS...

Total freedom for access and intervention

- Automatic anchor-passing, whether nearby or far-off, without manual intervention.
- Movement and intervention on either side of the lifeline.
- Used simultaneously by up to 3 operators in stainless-steel ring version.
- Used simultaneously by up to 5 operators in bi-material ring version.
- In compliance with EN795 category C.

Installation


- Unlimited lifeline length.
- 15 metres maximum between anchors.
- Implantation study upon request.

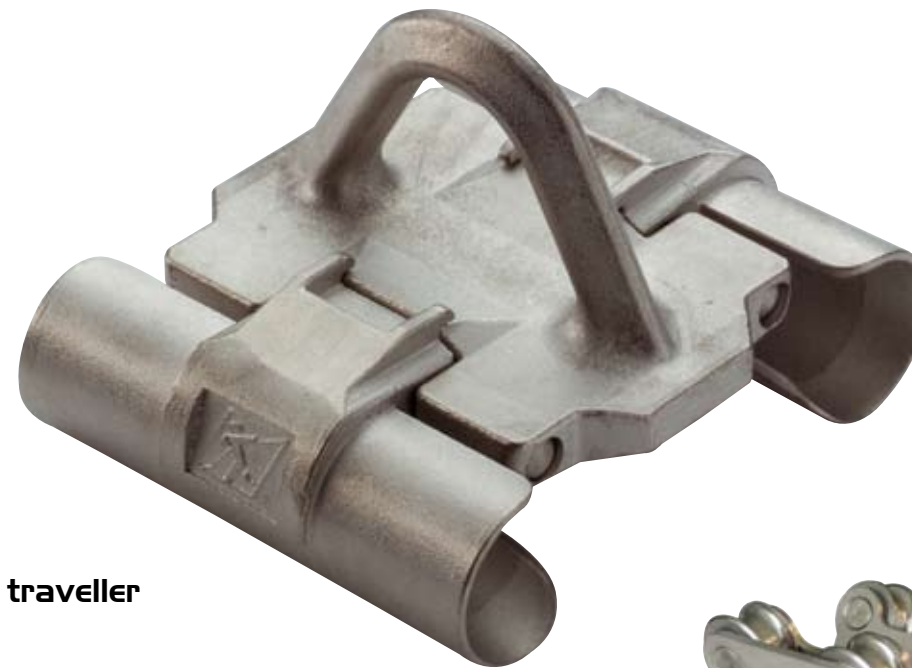


Standard traveller



Rollsafe traveller

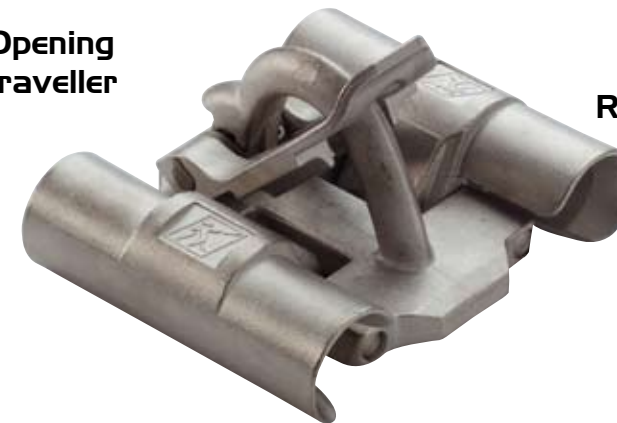

Opening traveller

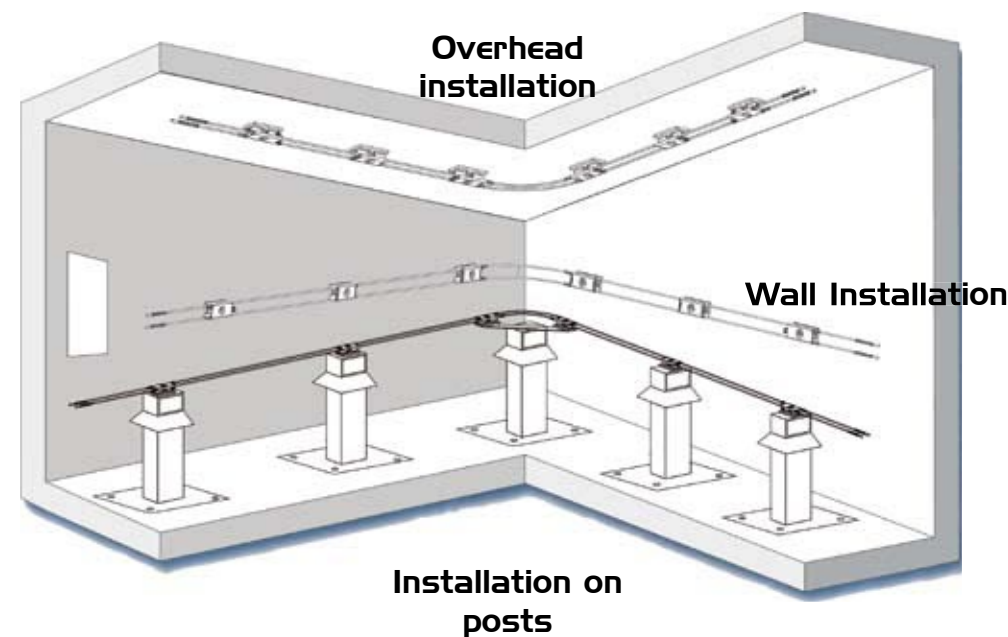

Overhead installation

Wall Installation

Installation on posts



Installation at ground level




Travflex™ LIFELINES

THE INSTALLATION SOLUTION FOR FRAGILE-SUPPORTING STRUCTURES AND ON STEEL ROOFS ...


Full freedom of movement and intervention

- Automatic anchor-passing, whether nearby or far-off, without manual intervention.
- Movement and intervention on either side of the lifeline.
- Used by up to 3 operators simultaneously.
- In compliance with EN795 category C.


Direct fixing on metal beam

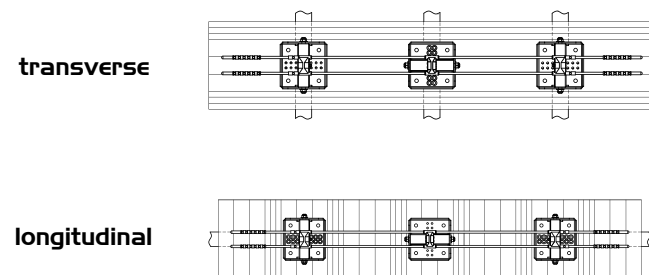


Fixing on steel-tank undulations (thickness > 0.75mm)

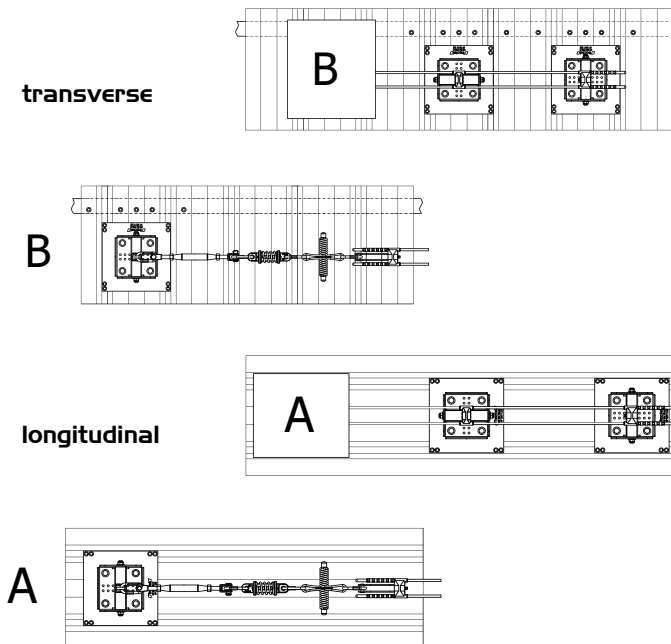

Concrete fixing

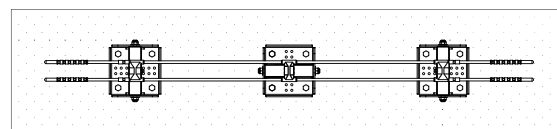

Fixing on other materials upon analysis

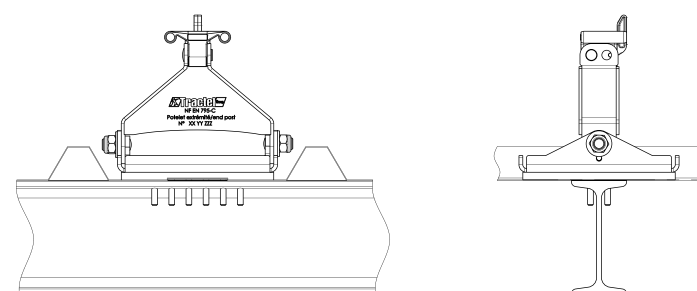


A controlled installation for each environment

- Unlimited lifeline length.
- 15 metres maximum between anchors.
- Resealing unnecessary.
- Direct fixing of anchors on the supporting surface, or using a plate when installing on steel-tank undulations.
- Installation study upon request.



Travflex™ ON STEEL AND ALUMINIUM ROOFS

Travflex™ ON FRAGILE-SUPPORTING STRUCTURES

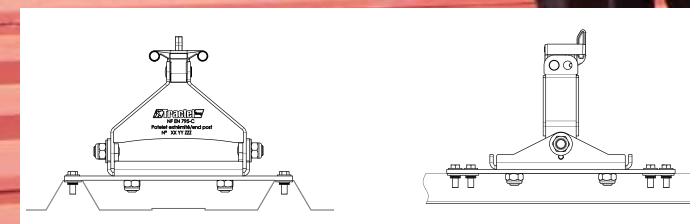

Travspring™ LIFELINES

THE QUICK AND EASY-TO-INSTALL MONO-CABLE LINE ...

... FOR MAKING YOUR SITES SAFE

Near-at-hand priority


- Manual anchor-passing using a simple connector.
- Used by up to 5 operators simultaneously.
- Line in compliance with EN795 category C.

You manage the installation


- Fast and simple to install.
- No special tools required.
- 15 metres maximum between anchors.




END ANCHOR



66848



66848




66848



66698




66698




40742



66858



66688




41282



18162


INTERMEDIATE



66868



66868



66868



66868



66868

CABLE

extra galva-

nised meter



25151



25091




25091



25091

BEND


inner wall



66878



66878



66878



66878




66878




66878


END ANCHOR



66848



66848



66848



66848



66848



66848



66848



66848




66848



66848

1 to 3 Users	4 to 5 Users
1 energy absorber (66688)	minimum 2 energy absorbers (66688)

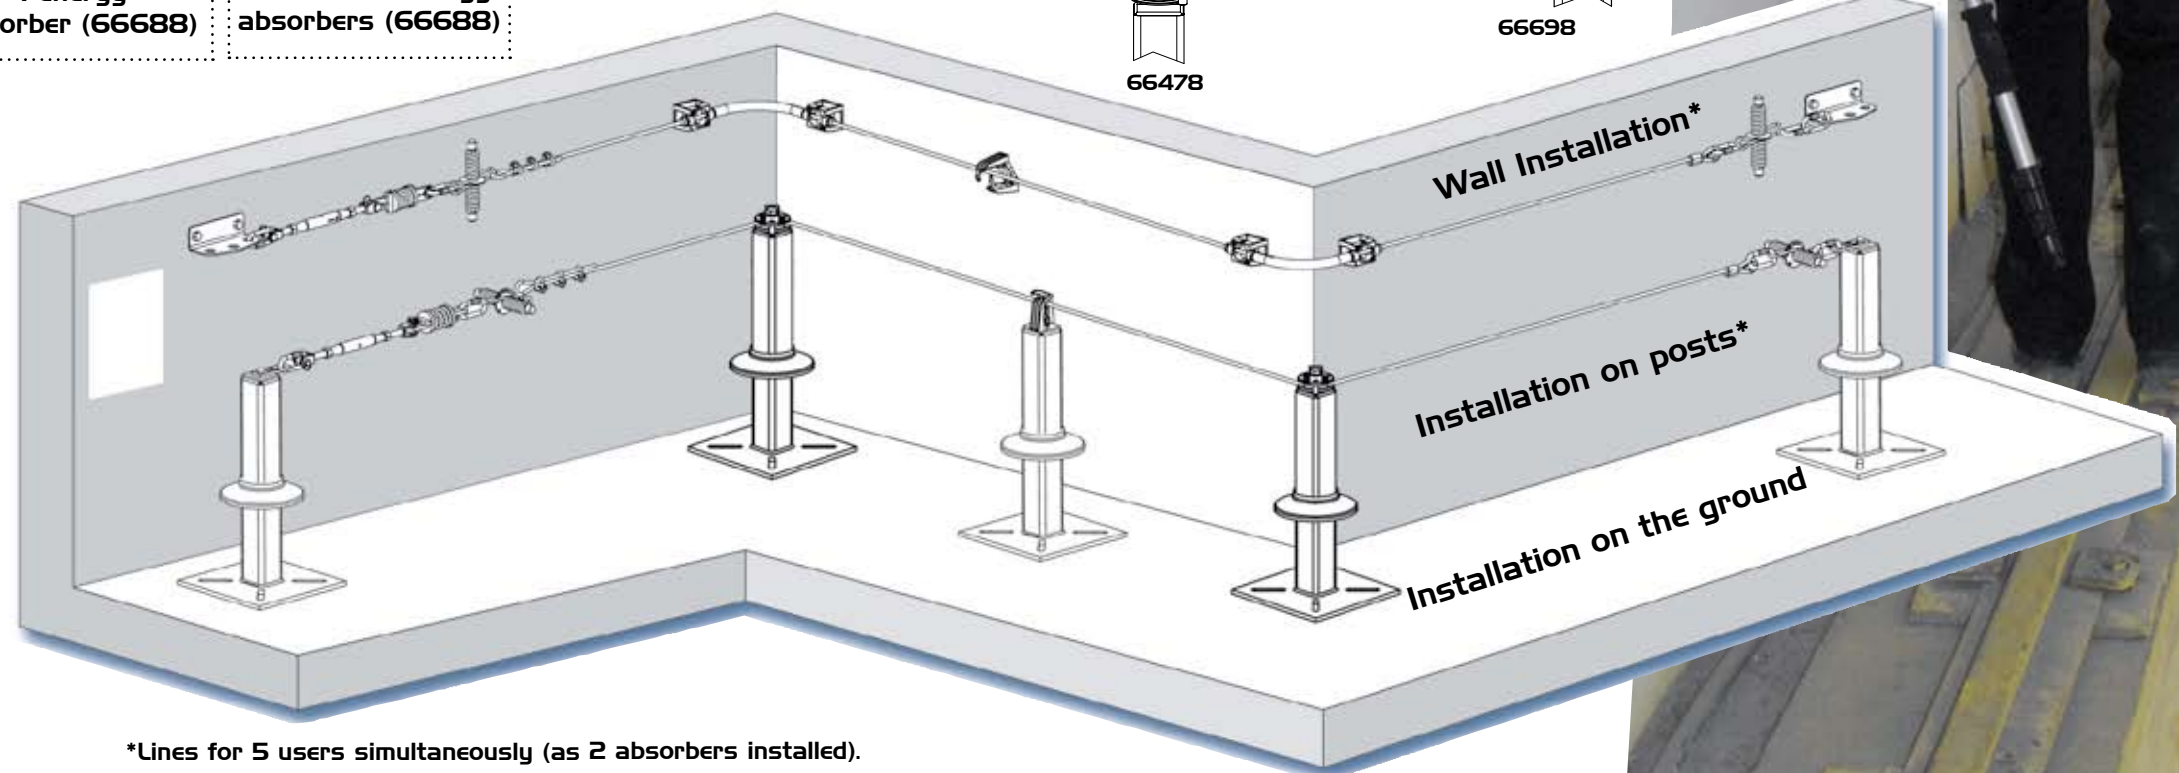

*Lines for 5 users simultaneously (as 2 absorbers installed).

