



HYDRAULIC JACK TOE | ultra-low

Compact and strong toe jack has three (3) toe heights and is very versatile designed. The hydraulic pump is protected by the lift housing. Manual pump lever. It lifts both on the toe and on the top housing. Lift handle and adjustable support legs are included.



HYDRAULIC ALLROUND JACK | universal/ultra-low

This ultra-low-profile with compact and reliable basic design can be used in all positions, horizontal and vertical. It lifts both on the foot and on the top housing. The housing of the jack can rotate 360 degrees which makes it unique. Suitable for all types of repairs, maintenance and installation works. The very low foot height measures only 25, 30 or 58 mm. Removable pump lever. Accurate lowering speed.



STEEL JACK | 1,5-10 ton

This series is developed in accordance with the latest safety regulations. Milled rack, geared wheels and tempered parts of driving gear. Lift from toe or the clawed head. Safety crank with folding handle.


HYDRAULIC FORKLIFT JACK ultra-low

Specially designed for forklift trucks, high capacity and a robust construction. Extra low pick-up position with double 2-position lift pad levels for hard-to reach places under low profile forklift trucks. Unique design of the hydraulic pump incl. high-quality seal kits and built-in overload protection valve. Removable handle and compact size. Confirms EC- and ANSI-standards. Support stands are included.



SUPPORT STANDS

Stand supports for Forklift trucks and other heavy machines. Heavy duty design with a wide foot base. Adjustable height: 242-400 mm. 2 stands always comes with the HFJ400A / HFJ700A.

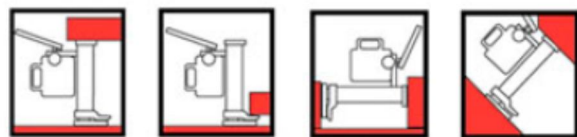

Hydraulic jacks can be used in many different ways. The illustrations above shows some of them.

TECHNICAL INFORMATION

| Art.no | TJ30 | TJ80 | HFJ400A | HFJ700A | HM50 | HM100 | HM250 | HK81,5 | HVS3A | HVS5A | HVS10A | HT-12 |
|--------------------|--------|--------|---------|---------|--------|--------|--------|--------|---------|---------|---------|---------|
| Capacity (ton) | 3 | 8 | 4 | 7 | 5 | 10 | 25 | 1,5 | 3 | 5 | 10 | 12/par |
| Stroke length (mm) | 130 | 140 | 341 | 355 | 205 | 230 | 215 | 300 | 350 | 300 | 300 | - |
| Lift range (mm) | 15-240 | 25-295 | 57-406 | 65-420 | 25-573 | 30-650 | 58-720 | 70-590 | 75-1075 | 70-1025 | 90-1100 | 242-400 |
| Weight (kg) | 22 | 28 | 35+12 | 53+12 | 25 | 35 | 102 | 11 | 20 | 24 | 42 | 13 |
| Price | | | | | | | | | | | | |