



TRUCK CHAINS

The OFA truck chains get the same surface-hardening treatment of the boron steel as all other OFA products. With precision heat treatment, the tread chain core remains tensile and the outside extremely durable. This is particularly beneficial in the logging industry, where many miles are covered with the chains on.

The truck chains come non-studded with square link 8 mm chain or round link chain in 8 mm with 9 mm studs. OFA's range of truck chains fits all common tire sizes – the studded chains can cope with even the most demanding conditions.

LS+ 8



Universal studded twisted link chain for front or double wheel outside. Recommended to drive wheel.



LST+ 8



Studded twisted link chain for front or double wheel outside. Tight cross bar pattern. Recommended to drive wheel.



LS+ 8

LST+ 8

Width	Rim	OFA code	Weight kg/pair	OFA code	Weight kg/pair
7.50-	16"			OL132841	34
8-	17.5"			OL132841	34
8.5-				OL132841	34
245/70-		OL130860	22		
265/70-	19.5"	OL130862	27		
435/50-		OL130823			
9.00-	20"	OL130864	32	OL132864	50
10.00-		OL130874	33	OL132874	53
11.00-		OL130884	35	OL132884	56
12.00-		OL130885	37	OL132885	61
13.00-		OL130815	42		
10.00-	22"	OL130831	38		
11.00-		OL130834	39		
10-	22.5"	OL130864	32	OL132864	50
11-		OL130874	33	OL132874	53
12-		OL130884	35	OL132884	56
13-		OL130885	37	OL132885	61
11/70-		OL130873	31		
275/70-		OL130873	31	OL132873	49
275/80-		OL130874	33	OL132874	53
295/60-		OL130882	30	OL132882	48
295/70-		OL130883	32	OL132883	52
295/80-		OL130884	35	OL132884	56
305/70-		OL130883	32	OL132883	52
315/70-		OL130884	35	OL132884	56
315/80-		OL130885	37	OL132885	61
385/55-		OL130894	36		
385/65-		OL130814	39	OL135110	68
425/65-				OL135113	77
445/65-				OL135115	83
12.00-	24"	OL130840	46		
11-	24.5"	OL130831	38		
12-		OL130834	39		
295/75-		OL130831	38		

SS+ 8



Studded twisted link steering chain for good side grip for steering wheel. Smoother drive compared to ladder style chains.

SS-NK 8



Non-studded square link steering chain for steering wheel. Smoother drive compared to ladder style chains.

A8-NK



Heavy duty non-studded chain for tough conditions. 8 mm square non-twisted chain with welded links to the side chain. Recommended for heavy on-road vehicles when high traction and long lifetime is needed. Tension chain as standard.

Tension chain as standard

Only welded rings




		SS+ 8		SS-NK 8		A8-NK		
Width	Rim	OFA code	Weight kg/pair	OFA code	Weight kg/pair	OFA code	Weight kg/pair	Tension chain
10.0/80-	12"	OL93572712	28					
27x10-		OL93572712	28					
27x8.50-	15"			OL93590275	24			
33x12.5-		OL93573312	36					
300-				OL93590305	36			
300/75-				OL93590305	36			
315/75-		OL93573312	36					
260/70-	16"	OL93572616	31					
10-	16.5"			OL93590165	31			
12-				OL93592165	36			
12.5-	18"					OL851959	57	TC
250/80-		OL93572518	35					
265/70-	19.5"	OL93572620	33					
285/70-				OL93590285	36			
445/45-		OL93574419	42					
8.25-	20"	OL93572922	38	OL93575296	38			
9.00-		OL93572920	37	OL93590920	40			
10.00-		OL93573020	42	OL93590180	42			
11.00-		OL93573120	44	OL93590200	46	OL851607	63	TC
12.00-		OL93573220	50	OL93590130	48			
12.5-		OL93573011	45	OL93590201	46	OL851958	62	TC
14.00-		OL93573420	59	OL93590140	64	OL851145	68	TC
14.5-						OL851960	69	TC
300/70-		OL93573002	37					
365/80-		OL93571365	51			OL851960	69	TC
365/85-						OL851728	62	TC
395/85-		OL93571395	56			OL851667	67	TC
425/85-	21"	OL93574221	63					


Table continues >

SS+ 8				SS-NK 8		A8-NK		
Width	Rim	OFA code	Weight kg/pair	OFA code	Weight kg/pair	OFA code	Weight kg/pair	Tension chain
10.00-	22"	OL93573124	45	OL93590224	44			
10-	22.5"	OL93572920	37	OL93590920	40			
11-		OL93573020	42	OL93590180	42			
12-		OL93573120	44	OL93590200	46	OL851607	63	TC
13-		OL93573220	50	OL93590130	48	OL851598	67	TC
15-		OL93571391	49	OL93590150	51			
275/70-		OL93572920	37					
275/80-		OL93573020	42					
295/60-		OL93572922	38	OL93575296	38			
295/70-				OL93590920	40	OL851604	53	TC
295/80-		OL93573120	44	OL93590200	46	OL851607	63	TC
315/60-		OL93573123	40	OL93590208	40			
315/70-		OL93573013	43	OL93590207	43			
315/75-		OL93573011	45					
315/80-		OL93573011	45	OL93590201	46	OL851607	63	TC
355/50-		OL93573123	40					
385/55-		OL93571393	45	OL93590148	45			
385/65-		OL93571391	49	OL93590150	51	OL851609	61	TC
425/65-		OL93574222	55					
445/65-		OL93574422	57					
14.00	24"					OL851599	83	TC
14.5						OL851770	75	TC
11-	24.5"	OL93573124	45	OL93590224	44			


Installing truck chains

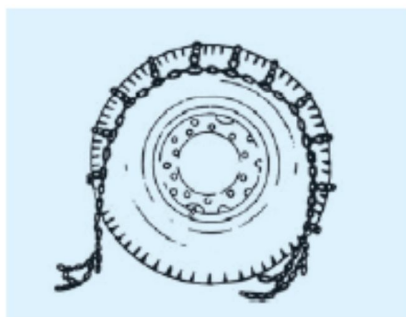

1. Install the chain on the top of the outer tire so that the lock is toward driving direction. Drive forward to the point where chain ends are on the same level.

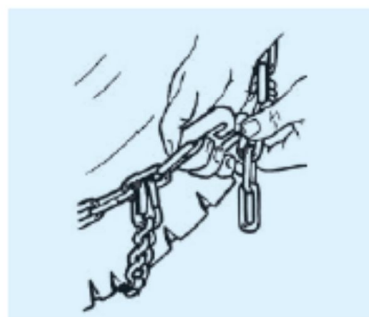

2. Fasten inner lock.

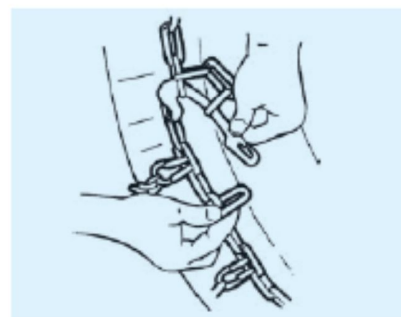

3. Fasten outer fastener to correct tightness and length. Drive forward and tighten if needed.