

# FORESTRY CHAINS






OFA forestry chains meet the demands of working in tough logging environments in a variety of ways. They significantly improve traction, thereby reducing fuel consumption and increasing productivity. The chains protect the sides and treads of expensive tires from stones, stumps and branches.

OFA has the industry's widest range of tire chain models with different sizes and patterns. Thanks to

the modern manufacturing, comprehensive central warehouse and global dealer network, OFA products are always available wherever professional loggers need them.

The world's best-selling forestry chain OFA Matti W is the most popular chain for all forestry machine applications.

## Which chain for which purpose?

												
	Tractor	Forest Tractor	S Small	M Medium	L Large	S Small	M Medium	L Large	S Small	M Medium	L Large	Scarifier
Tapio 11	•••	•	•									
Tapio 11 HD	•••	••	••			•			•			
Twist 11		•••	•••	••		••			•••			
Tapio 13			••	•		•	•		••	•		
Twist 13						•••	••		•••	••	•	
Craftec+ 13			•••	••		•••	••		•••	••	•	
Protec 13			•••			•••	••		•••	•••		
Matti W 13				••		•••	••	•	•••	•••	••	
Twist 16 1D			•••	••								
Craftec+ 16				•••		•••	•••	••		•••	••	
Craftec 16				•••		•••	•••	••		•••	•••	
Protec 16							•••	••		•••	•••	
Paragon 16							•••	•••		•••	•••	••
Matti W 16				•••	••		•••	•••		•••	•••	••
Matti W 19					•••			•••			•••	•••



# Twist

## Twist 11



Twist 11 mm is a heavy duty double pattern version with especially high traction and very dense chain mesh for maximum grip. Designed for forest tractors, skidders, small forwarders and harvesters.

Twist 11 has 11 mm twisted links and 13 mm studs which ensures good grip and excellent resistance to wear and fracture. It gives a good tire protection against stones and stumps.



Twist 11

### Technical specifications

Tread chain	diam. 11 mm
Stud	diam. 13 mm
Side chain	diam. 11 mm



## Twist 13



Twist 13 is designed for lighter forest machines and construction machines.

The tread chain has 2-diamonds and the links are twisted so they lie against the tire surface and give very aggressive traction. Twist 13 chain gives a good tire protection against stones and stumps.



Twist 13

### Technical specifications

Tread chain	diam. 13 mm
Studs	diam. 14 mm
Side chains	diam. 11 mm



# Tapio

## Tapio 13




Tapio 13 has a 1-diamond pattern for lighter-weight forestry and construction machines.

The less tight construction ensures easy installation and good self-cleaning of the chain, with still enough grip for most applications.



Tapio 13

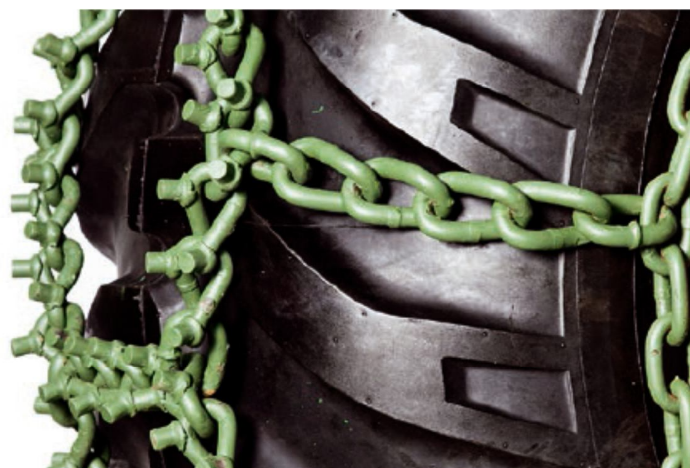

### Technical specifications

Tread chain	diam. 13 mm
Stud	diam. 14 mm
Side chain	diam. 11 mm

### Twist 11

### Twist 13

### Tapio 13

Width	Rim	OFA code	Weight kg/pair	Tension chain	OFA code	Weight kg/pair	Tension chain	OFA code	Weight kg/pair
500/45	22.5"	OL9352501113	169	TC					
550/45		OL9352552013	187	TC					
600/50		OL9352601913	201	TC	OL97276022	245	TC	OL93396022	167
650/50		OL9352652213	216	TC					
700/45		OL9352702113	211	TC	OL97277022	246	TC	OL93397022	175
710/40		OL9352702113	211	TC	OL97277022	246	TC	OL93397022	175
14.00	24"	OL9352133313	201					OL93397424	173
14.9		OL9352132313	180						
16.00		OL9352163113	230					OL93397430	198
16.9		OL9352162613	213	TC					
18.00								OL93397825	235
400/80		OL9352504113	187						
420/65		OL9352422613	193	TC					
440/65		OL9352442413	198	TC					
480/65		OL9352504513	210	TC					
500/65		OL9352504513	210	TC					
540/65		OL9352154413	217						
650/45	24.5"				OL97276524	252	TC	OL93396524	192
710/40					OL97277124	253	TC		
16.00	25"							OL93397430	198
17.5								OL93397414	174
18.00								OL93397825	235
20.5		OL9352202813	240					OL93397521	208
23.5								OL93397525	240
26.5								OL93397625	276
26.5 L5								OL93397626	293
29.5								OL93397925	318
29.5 L5								OL93397926	333
30/65								OL93397365	273
555/70		OL9352542213	240	TC					



## Twist 11

## Twist 13

## Tapio 13

Width	Rim	OFA code	Weight kg/pair	Tension chain	OFA code	Weight kg/pair	Tension chain	OFA code	Weight kg/pair
18.4	26"	OL9352163113	230					OL93397429	186
23.1		OL9352232813	281	TC	OL97272326	310		OL93397525	240
28.1		OL9352282713	278						
		OL9352282513	298	TC					
480/70		OL9352504313	211						
520/70		OL9352482913	249	TC					
620/75		OL9352622713	307	TC					
500/60	26.5"	OL9352502713	199					OL93395026	170
		OL9352503313	216	TC					
500/65		OL9352503013	210						
		OL9352503613	220	TC					
505/50		OL9352504113	187						
540/60		OL9352154413	217						
600/55		OL9352632413	237	TC	OL97276026	268	TC	OL93398626	193
650/65		OL9352652613	231		OL97276526	313	TC	OL93396526	219
700/50		OL9352712613	255	TC	OL97277026	294	TC	OL93397026	204
750/55					OL97277526	324	TC	OL93397526	230
780/55					OL97277826	329	TC		
800/50		OL9352812613	288	TC					
14.9	28"	OL9352133313	201						
16.9		OL9352162813	218						
420/70		OL9352422813	208						
440/65		OL9352442813	197						
480/70		OL9352482713	222						
500/65		OL9352504213	225	TC					
		OL9352504313	211						
500/70		OL9352482713	222						
540/65		OL9352542213	240	TC					
600/60		OL9352602913	259	TC					
600/65		OL9352604213	269	TC					
775/65	29"							OL93397729	290
16.9	30"	OL9352163113	230					OL93397429	186
18.4		OL9352183013	235					OL93397434	199
480/70		OL9352482913	249	TC					
520/70		OL9352483413	244						
540/70		OL9352202813	240						
710/55		OL9352713013	250						
600/60	30.5"	OL9352604213	269	TC					
700/50		OL9352713113	283	TC					
750/50		OL9352713013	250						
16.9	34"	OL9352163413	230					OL93397434	199
18.4		OL9352183413	257					OL93397534	212
		OL9352183613	271	TC					
23.1		OL9352233413	279	TC					
480/70		OL9352483413	244						
520/70		OL9352523613	280	TC					
		OL9352548813	267						
600/65		OL9352603213	259	TC	OL97276034	315		OL93397525	240
		OL9352603313	246						
650/75								OL93396538	262
700/55		OL9352703313	276	TC	OL97277034	340		OL93397034	250
		OL9352703613	264						
700/70		OL9352703513	303		OL97277035	391		OL93397035	292
16.9	38"	OL9352153513	250					OL93397534	212
18.4		OL9352183813	270					OL93397538	226
20.8		OL9352203913	300					OL93397238	260
460/85		OL9352463813	281						
480/70		OL9352548813	267						
520/70		OL9352523813	287						
520/85		OL9352583813	311						
540/65		OL9352543713	276						
540/80								OL93397238	260
580/70		OL9352583813	311						
600/60		OL9352603913	257						
600/65		OL9352604013	263					OL93396038	257
		OL9352604613	280	TC					
650/65		OL9352653613	284					OL93396538	262
		OL9352653713	304	TC					
650/75		OL9352653513	317					OL93397638	319
700/65		OL9352703513	303						
520/85	42"	OL9352524213	334						
580/70		OL9352524213	334						